


# **NEW UPGRADES NOW STANDARD!**

**-LIGHTER ALUMINUM FRAME WORK-**  
**-12.2 GAUGE CUT/ABRASION RESISTANT WIRE-**

## **400 CFM PORTABLE AFTERCoolERS**

### **ACSE400-12V-4P**

4-PRONG INLET & 4-PRONG OUTLET

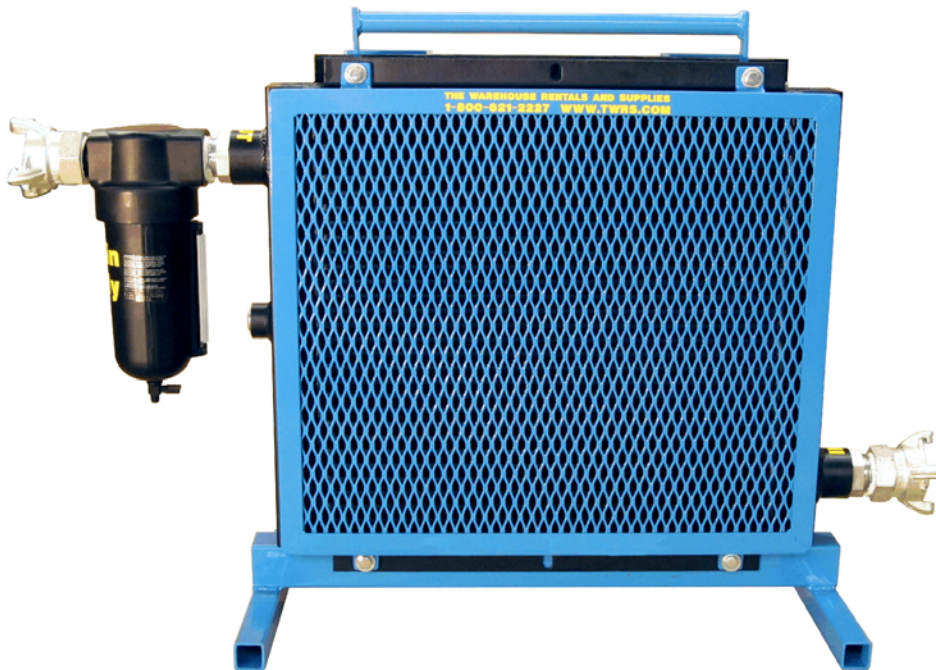

#### **STANDARD SPECIFICATIONS:**

- 4-PRONG SET-UPS STANDARD
- 40 MICRON AIR FILTER/SEPARATOR WITH A 1QT. RESERVOIR AND MANUAL DRAIN
- 50 FEET OF 12.2 GAUGE CUT/ABRASION RESISTANT POWER CORD WITH CLAMPS
- ALUMINUM CONSTRUCTED STAND, FIN GUARD, HANDLE AND PROTECTIVE CORD WRAP
  - RATED 400 CFM OF AIRFLOW
  - MAXIMUM PSI: 150PSI
- SHIPPING/ASSEMBLED WEIGHT: APPROXIMATELY 64 POUNDS
- APPROXIMATE DIMENSIONS ASSEMBLED: 40" w x 27" h x 14" d

#### **OPTIONS:**

- ALTERNATIVE FITTINGS FOR INLET/OUTLET & BALL VALVES AVAILABLE
- TWIST LOCK EXTENSION CORDS IN 50' AND 100' INCREMENTS
- 120V AC TO 12V DC CONVERTERS